



Ground screw MTR U adjustable, 80-170x685x2,0mm, HDG

Art. No.:	6260S-080
EAN:	8596221752498
Weight:	3.15 kg (tol. +- 3%)
Material:	Structural steel S235, class 4.6
Surface treatment:	Hot-dip galvanized per EN ISO 1461
Load limits:	Pressure load 700 kg Tension load 400 kg Shift load 200 kg
Application:	wooden structures, shelters, pergolas, playgrounds, timber houses

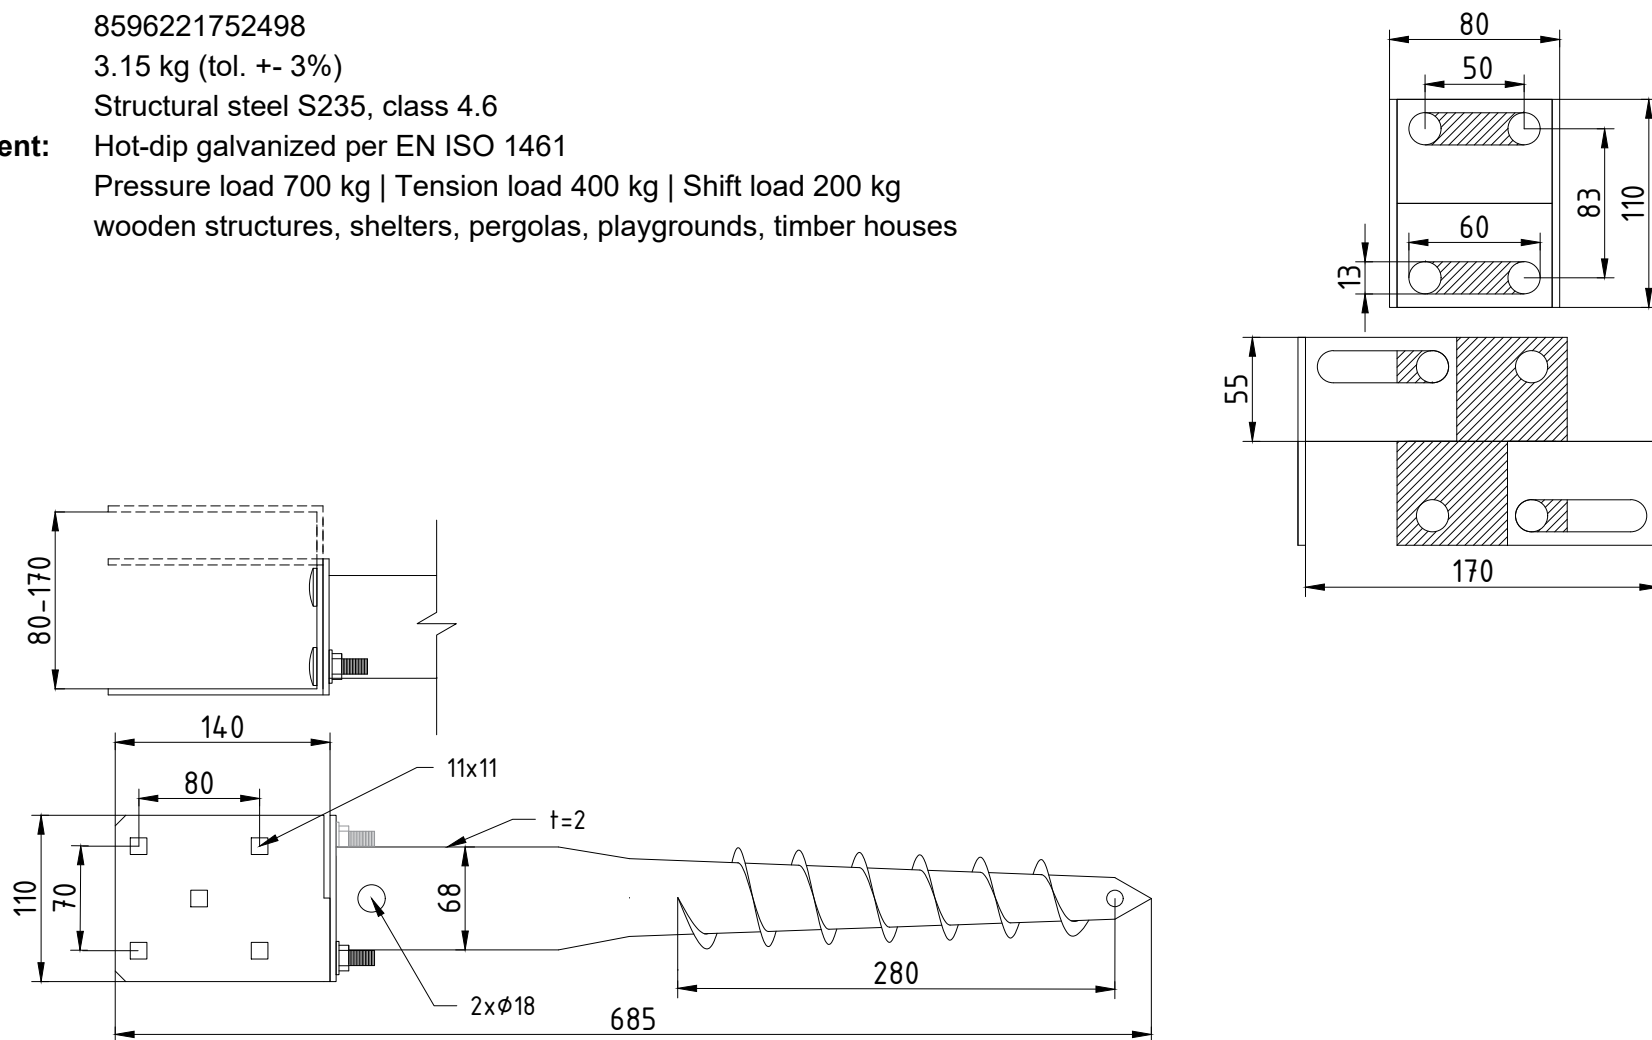

Ground screw MTR U adjustable, 80-170x885x2,0mm, HDG

Art. No.:	6260S-081
EAN:	8596221752504
Weight:	3.60 kg (tol. +/- 3%)
Material:	Structural steel S235, class 4.6
Surface treatment:	Hot-dip galvanized per EN ISO 1461
Load limits:	Pressure load 875 kg Tension load 500 kg Shift load 250 kg
Application:	wooden structures, shelters, pergolas, playgrounds, timber houses

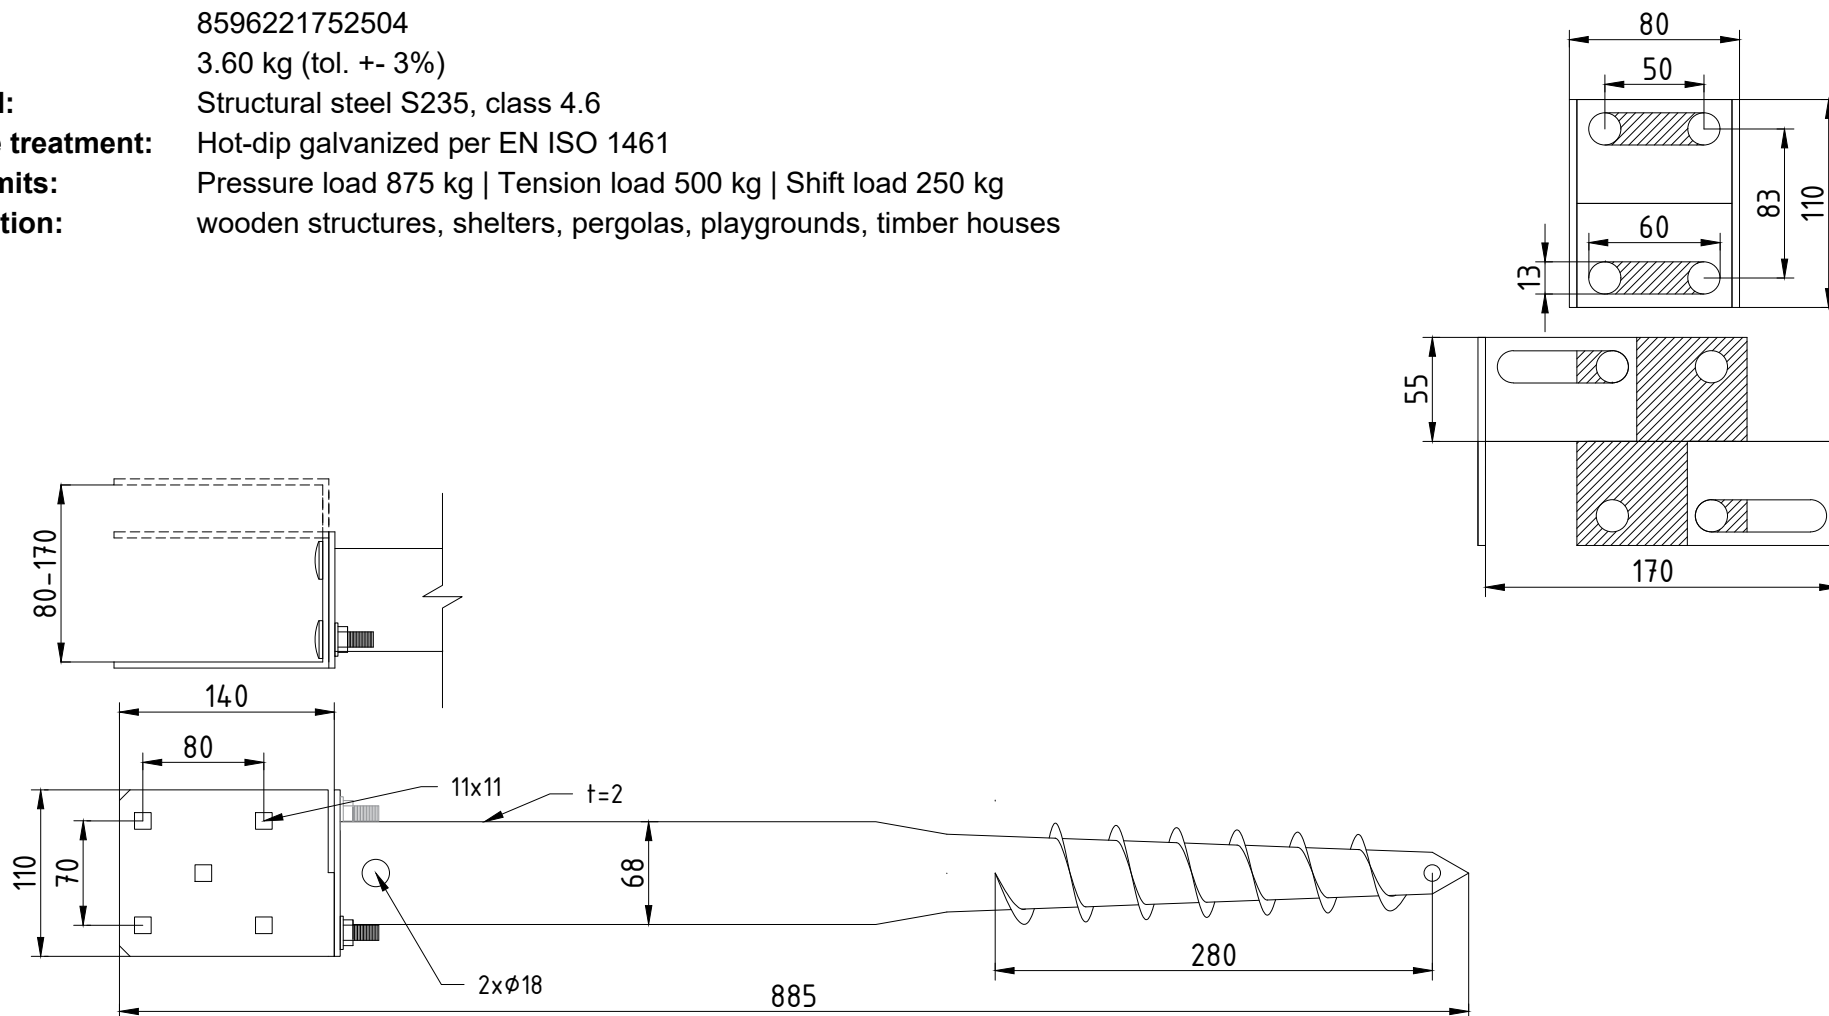

Technical drawing showing a mechanical assembly with dimensions:

- Overall width: 80
- Inner width: 50
- Overall height: 110
- Inner height: 83
- Width of the lower section: 60
- Height of the lower section: 13
- Overall height of the lower section: 55
- Overall width of the lower section: 170

