



Ground screw MTR G, 68x550x2,0mm, 1xM8, HDG

Art. No.:	6265-550
EAN:	8596221750609
Weight:	1.60 kg (tol. +- 3%)
Material:	Structural steel S235, class 4.6
Surface treatment:	Hot-dip galvanized per EN ISO 1461
Load limits:	Pressure load 700 kg Tension load 400 kg Shift load 200 kg
Application:	posts, fences, garden equipment

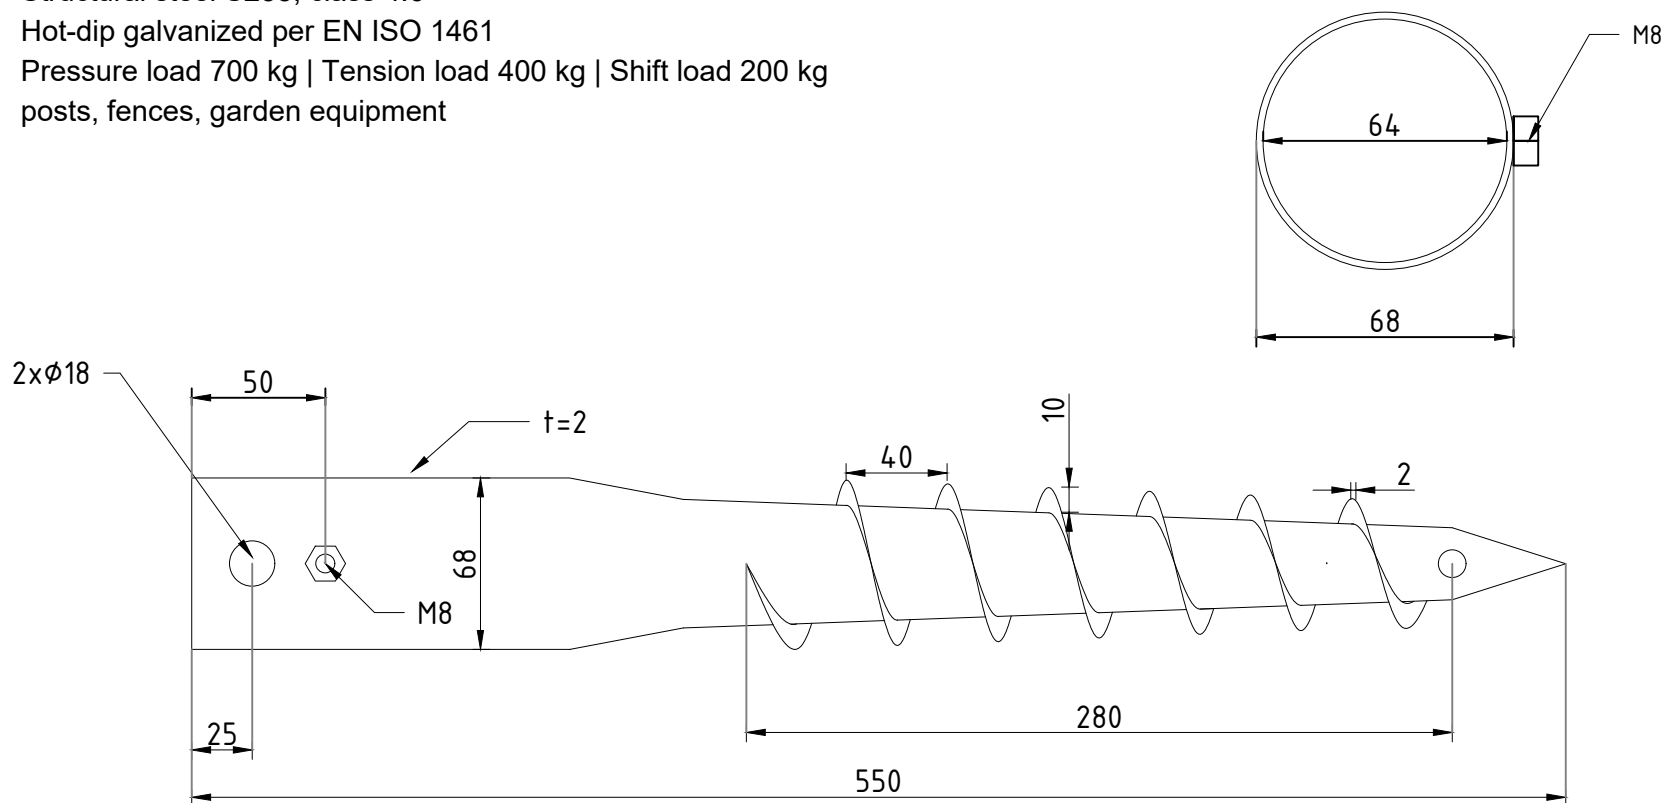


Technical drawing of a circular flange. The outer diameter is 68. The inner diameter is 64. There are three mounting holes, each with a diameter of 3xM8. The holes are spaced 120 degrees apart.

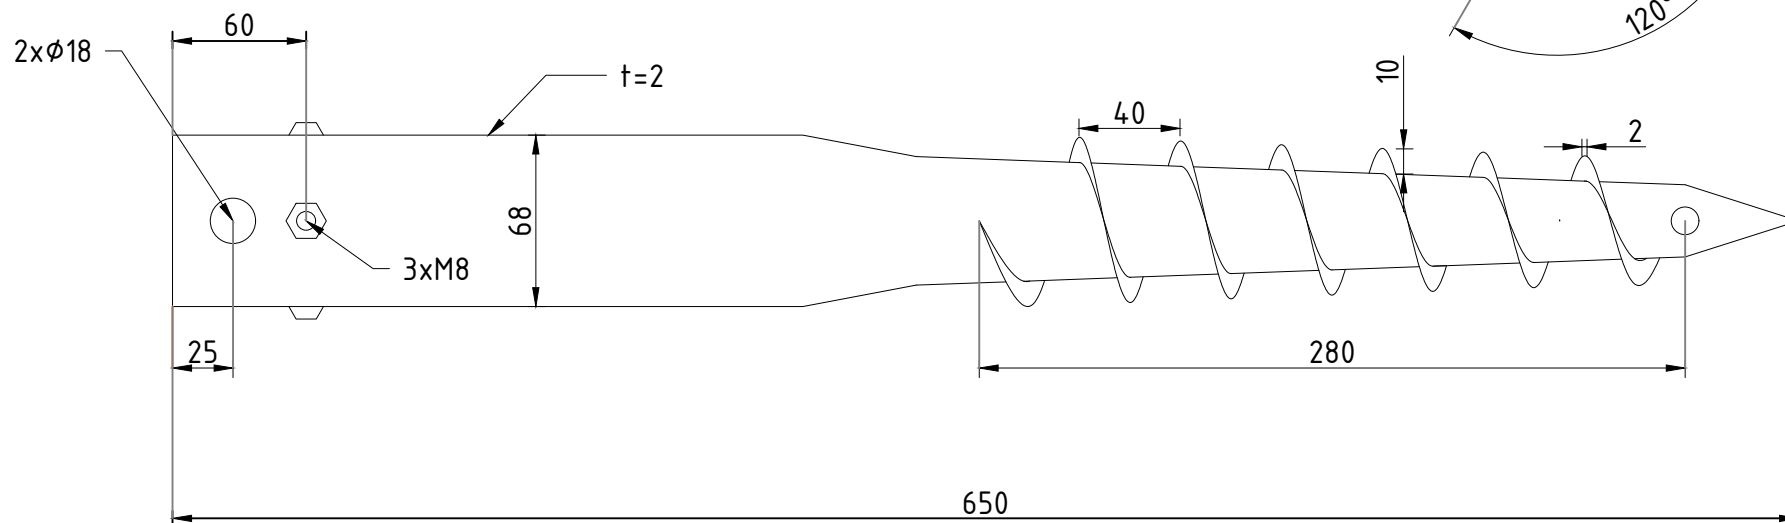

Ground screw MTR G, 68x750x2,0mm, 3xM8, HDG

Art. No.:	6265-750
EAN:	8596221750388
Weight:	2.20 kg (tol. +- 3%)
Material:	Structural steel S235, class 4.6
Surface treatment:	Hot-dip galvanized per EN ISO 1461
Load limits:	Pressure load 875 kg Tension load 500 kg Shift load 250 kg
Application:	posts, fences, garden equipment

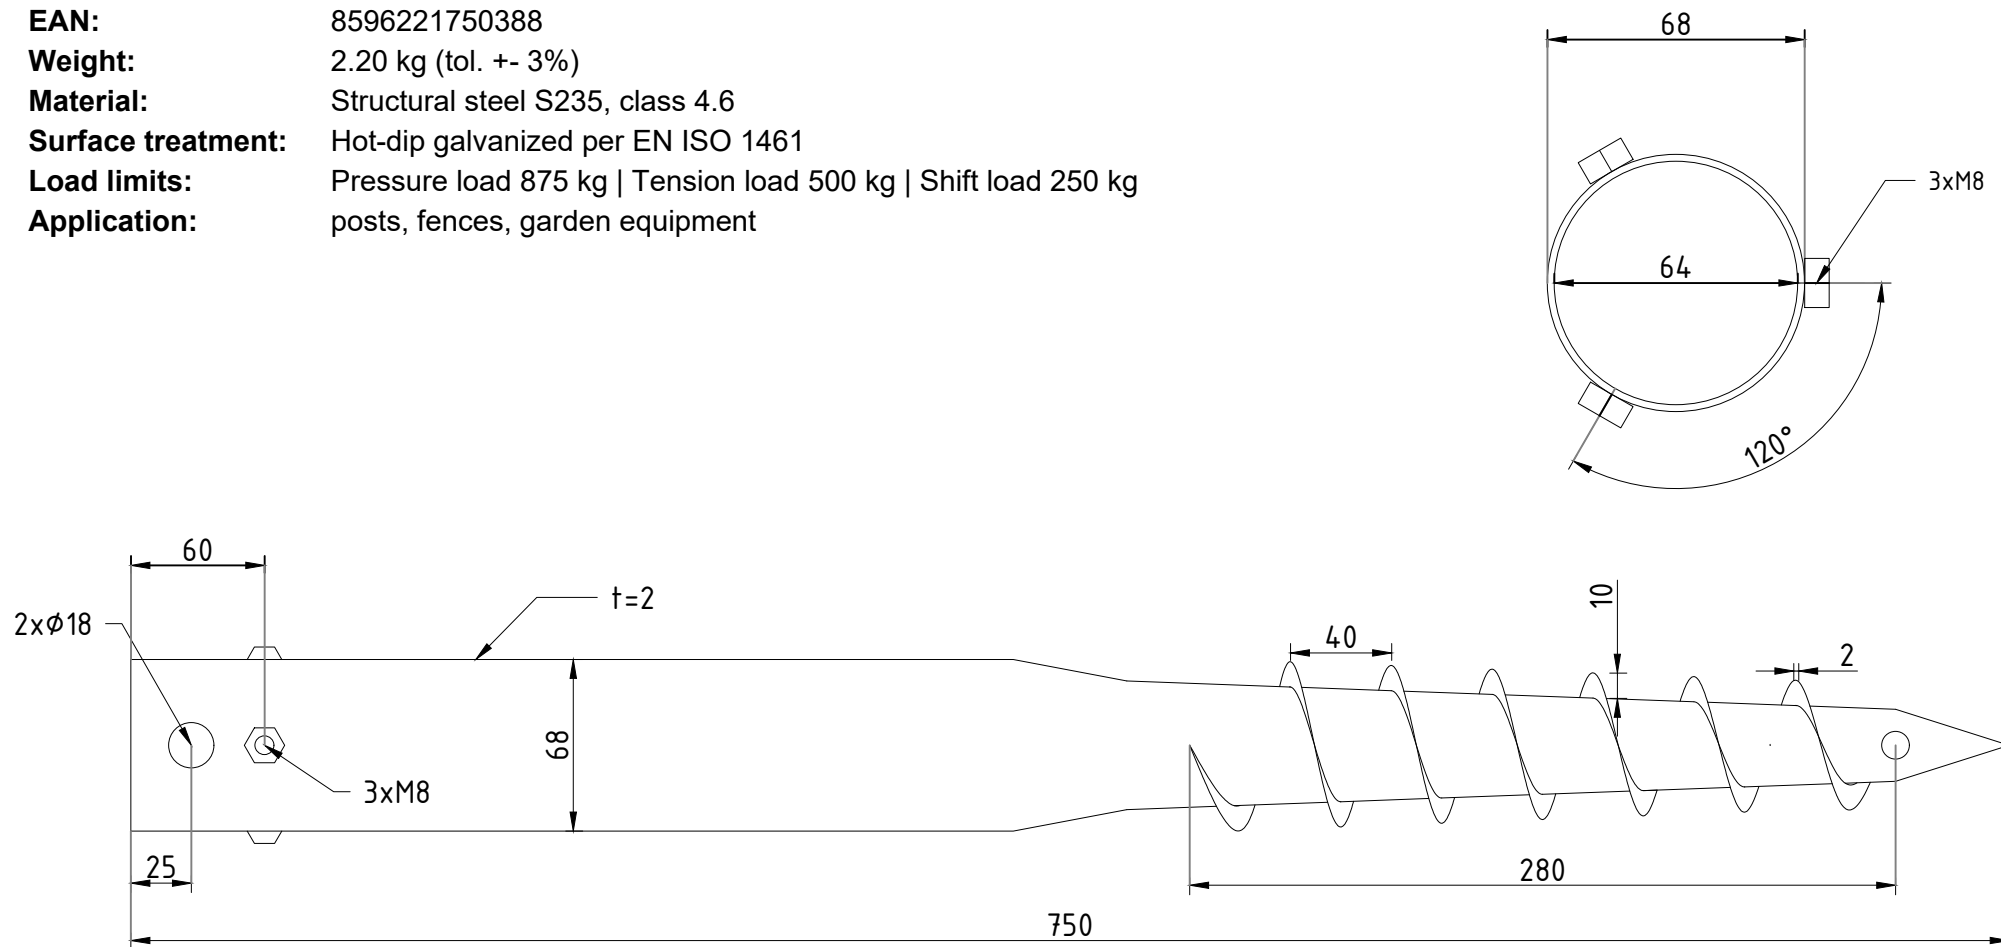

Ground screw MTR G, 68x900x2,0mm, 3xM8, HDG

Art. No.:	6265-900
EAN:	8596221753587
Weight:	2.66 kg (tol. +- 3%)
Material:	Structural steel S235, class 4.6
Surface treatment:	Hot-dip galvanized per EN ISO 1461
Load limits:	Pressure load 1050 kg Tension load 600 kg Shift load 300 kg
Application:	posts, fences, garden equipment

